

AOSHENG[®]

CREATES A GREEN WORLD

Product Catalogue 2019/2020




NINGBO·CHINA
www.aosheng.com.cn

力世家 匠

Technology creates a green world




Company Introduction & Innovation History

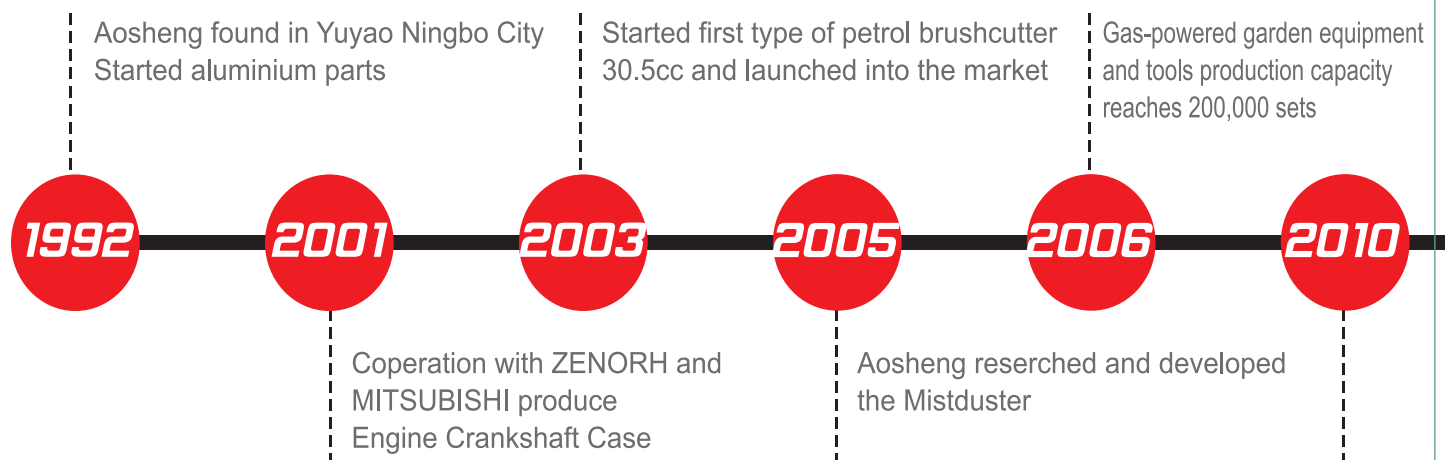



B Factory

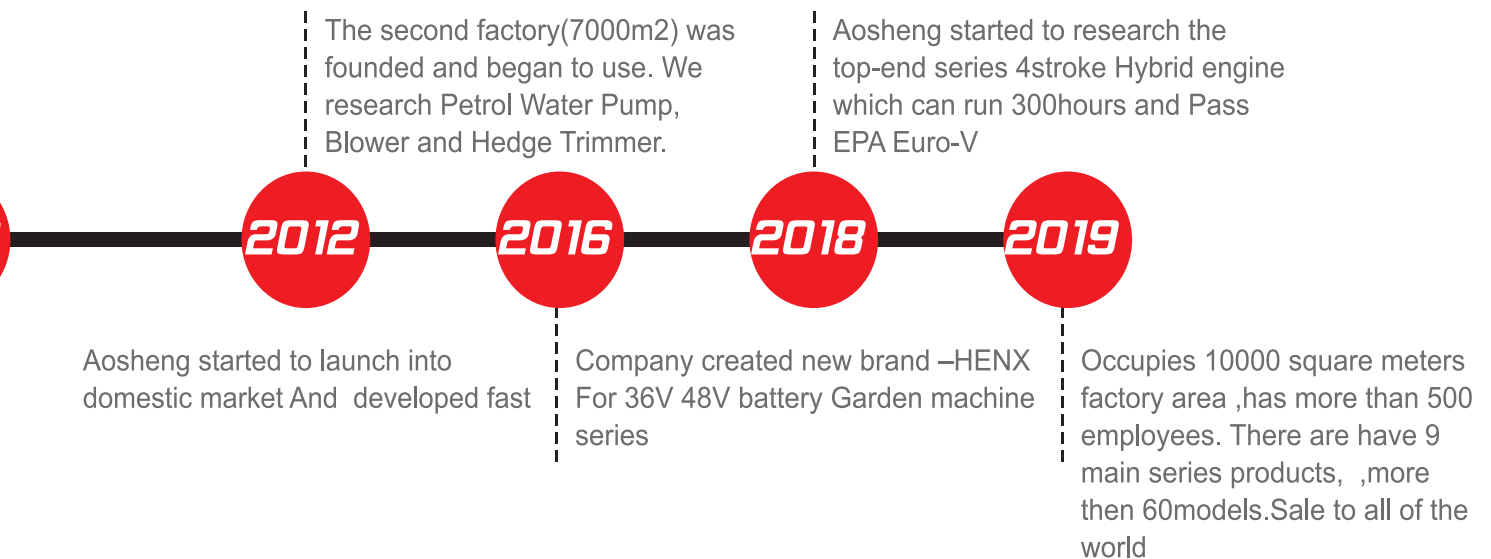

PRODCUTS R&D


AOSHENG R&D leaded by Japanese engineer who used in MITSUBUSHI HEAVY INDUSTRIES more then 20 years .His team consists of 40 skilled technicians. the products R&D center and lab which equipped with the advanced testing device, such as dynamometer machine, exhaust emission machine, fans testing machine, three-dimentional measuring machine, material testing machine, spectrum analyer ect. We have.advanced design concept and the key technology that meet engine emission requirements. A varity of our engines have passed the Euro V and EPA attestation.AOSHENG efforts to be a first-class manufacturer like STIHL MAKITA MITSUBUSHI ect





Workshop

AOSHENG

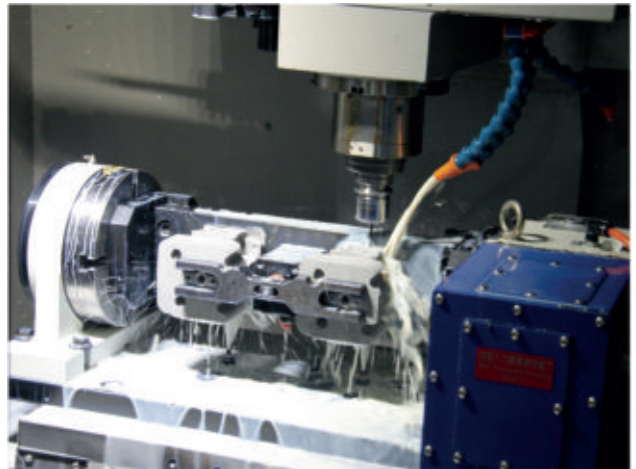


Quality management& Exhaust Technology



Quality management& Exhaust Technology

Aosheng has the domestic first-class products testing center .All accessories process and products Are tested by Aosheng own test programs .These tests and inspections are up to ISO9001 standard.

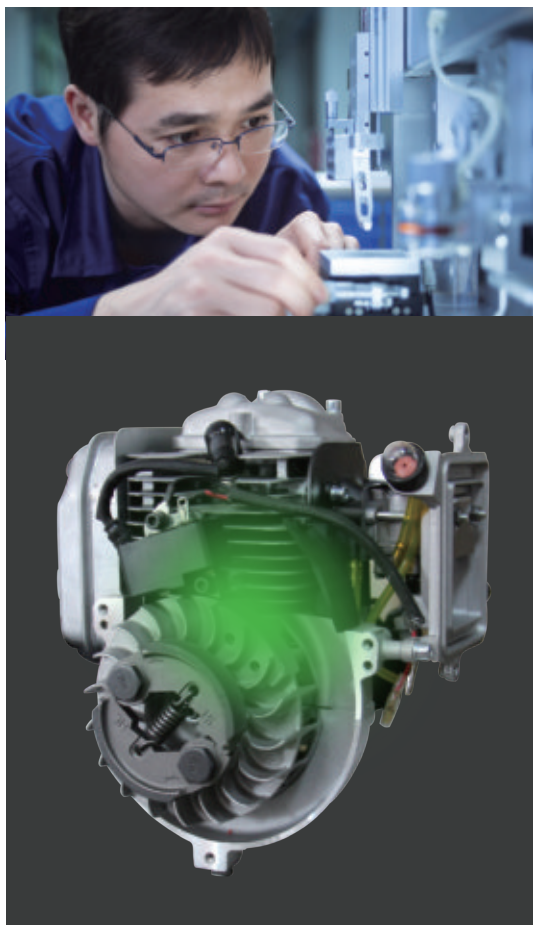

Clean Exhasut Technology

Aosheng engineers have patent technology to reduce the unburned emission of engine so that can comply with even the most strict emission standard like EPA EURO-V

PRODUCTS DISPLAY





As one of the biggest manufacturers in Agricultural and Garden machinery in China, we always develop and produce the energy conservation, Environmental protection, high-quality and high-efficient products. Our company took the lead in passing the evaluation of ISO9001 and ISO14001 Quality Management System. Insistent technological innovation and constant quality control make our products pass GS, CE, EPA and Euro-V certificates.

CERTIFICATE		 TÜV Rheinland Technische Überwachungs- und Prüfungsinstitut
for EC-Type Examination EC Directive 2006/42/EC Article 12, Section 3b Machinery		
Registration No.:	804 50412712 0001	
Report No.:	001408337 001	
Holder:	Wingco Anemang Machine Co Ltd No. 73 West Nantang Road, Luchuan Industrial Park, Yuyao, Zhejiang 315462 P. R. China	
Product:	Scale Test Multi function test position	
Identification:	Type designation: 2002 Serial number: 0-1000 Weight (kg): < 1000 Typical capacity: 30 Tonn	
This product is in conformity with the requirements of Annex 1 of Council Directive 2006/42/EC. This EC-type Examination Certificate is an attestation of the above mentioned product as classified in Annex VI and distributed in the EU Technical Report. It does not imply an assessment of the status produced or intended for use of a unit of conformity or TUV Rheinland. The holder of certificate is authorized to use this EC Type Examination Certificate in connection with the declaration of conformity according to Annex 9 of the Directive.		
Valid till:	20.09.2013	
Date:	20.09.2013	
	Authorized Sign: 	
TUV Rheinland LGA Products GmbH - Tilkenstraße 2 - 90431 Nürnberg <i>Authorized by: Beauftragte der Länder für Sachverständigen (BdL)</i> Notified under No. 0187 in the EC Directive.		

CERTIFICATE • CERTIFICADO • CERTIFICATE



TÜV
Product Safety

Attestation of Conformity

No. **BSA 18 11 81281 028**

Holder of Certificate: **Winglo Aasheng Machine Co., Ltd.**
 Lashan Industrial Park
 170402 Yantai, Shandong
 PEOPLE'S REPUBLIC OF CHINA

Product:

Model(s):

Parameters:

Leaf blower

EBV250, EB260

Engine power: Max. engine power: Max. engine speed:	300W 2.000/Min. 2700/min.
--	--

Tested according to: **EN 14183:2004+A1:2015**

This Attestation of Conformity is issued on a voluntary basis according to General Product Directive (GPD) relating to machines. It confirms that the listed equipment and items (if applicable) conform with the principal protection requirements of the directive. It refers only to the version submitted by TUV SUD Product Service (Sud) for testing and certification. See also notes attached.

Test report no.:

10489107-0010-02

Date: 2015-11-05

(Signature)



CE After presentation of the necessary technical documentation as well as the CE declaration of conformity the required CE marking can be affixed on the product (for additional provisions please see in the document)

Page 1 of 1

TUV SUD Product Service GmbH · Zentralfabrikat · Nikolausstr. 6 · 80335 München · Germany

TUV



History R&D showroom Certifications	01-09
Brushcutter	11-16
Blower	17-18
Water Pump	19-20
Pole saw / Multi tools	21-22
Sprayer / Drilling machine	23-24
Hedge trimmer / 48V Lithium scisser	25-26
Olive shaker / Lithium oiveshaker	27-28
Blower / Mist duster	29-30
Lawnmower	31-32
Sprayer / Brushcutter	33-34
OPTIONAL PARTS	35-36



EURO-V



AOSHENG /Brushcutter

Auto stop switch

If the machine is turned off, the stop button returns to start position automatically

PRO
Brushcutter

Anti-vibration system

The anti-vibration tube reduce vibration .the user will be more comfortable

360°

CG145/CG151

shaft

Strong 28x2mm shaft and 8x9mm drive shaft

new


Bigger protector

It can offer 165mm cut width . Work efficiency increase so much



AOSHENG /Brushcutter

360°

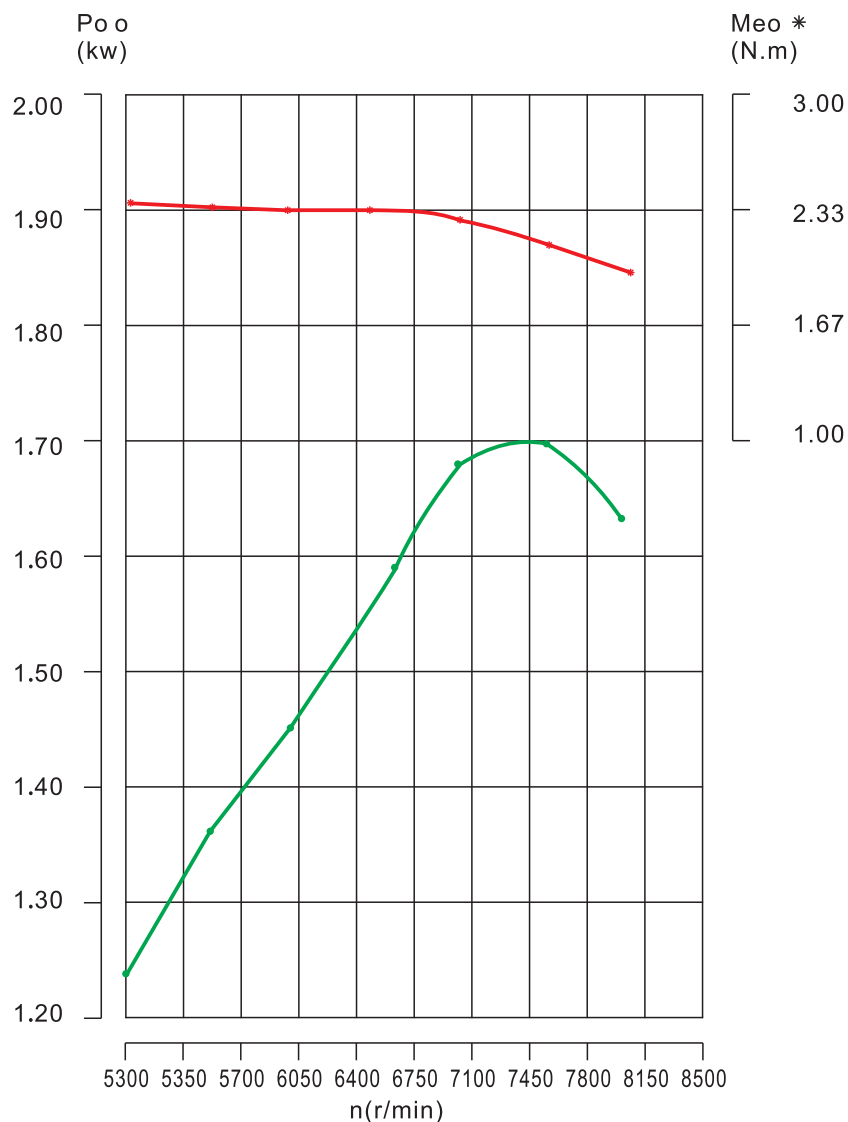

SPECIFICATIONS

	CG145	CG151
Structure	OHC	OHC
Inner diameter/Stroke	42/32mm	45/32mm
Displacement	44.3cc	50.9cc
Max power	1.52kw/7500rpm	1.70kw/7000rpm
Max Torque	2.25N.m/6000rpm	2.4N.m/5000rpm
Fuel tank	1.29L	1.29L
Weight	5.1kg	5.2kg
Fuel consumption	480g/kw.h	450g/kw.h
HC+NO(EPA&CARB≤72)	15.6	17.6
CO(EPA&CARB≤536)	388	408
Use micture fuel	40:1	40:1



EURO-V



AOSHENG /Brushcutter

PRO
Brushcutter

new



BG151/BG145



SPECIFICATIONS	BG145	BG151
Structure	OHC	OHC
Inner diameter/Stroke	42/32mm	45/32mm
Displacement	44.3cc	50.9cc
Max power	1.52kw/7500rpm	1.70kw/7000rpm
Max Torque	2.25N.m/6000rpm	2.4N.m/5000rpm
Fuel tank	1.29L	1.29L
Weight	5.1kg	5.2kg
Fuel consumption	480g/kw.h	450g/kw.h
HC+NO(EPA&CARB≤72)	15.6	17.6
CO(EPA&CARB≤536)	388	408
Mixed fuel ratio	40:1	40:1



EURO-V



AOSHENG /Brushcutter

PRO
Brushcutter

CG430GX/CG520GX



CG430GX-H/CG520GX-H



Professional brushcutter and Clearing saws
Comfortable,durable and powerful professional tools



TECHNICAL SPECIFICATIONS	CG430GX	CG520GX
Displacement	43cc	52cc
Mating Power	1E40F-5GX	1E44F-5GX
Power	1.25/6500kw/r/min	1.46/6500kw/r/min
Carburetor type	Diaphragm	Diaphragm
Mixed Fuel Ratio	40:1	25:1
Work rod diameter	26/28mm	26/28mm
Fuel tank	1.2L	1.2L
Weight	10.3kg	10.3kg



EURO-V



AOSHENG /Brushcutter

PRO
Brushcutter



CG330B/430B/520B



BG330B/430B/520B

SPECIFICATIONS	CG330B	CG430B	CG520B	BG330B	BG430B	BG520B
Displacement	33cc	43cc	52cc	33cc	43cc	52cc
Mating Power	1E36F-2B	1E40F-5B	1E44F-5B	1E36F-2B	1E40F-5B	1E44F-5B
Power	0.9kw/8000r/min	1.25/6500kw/r/min	1.46/6500kw/r/min	0.9kw/8000r/min	1.25/6500kw/r/min	1.46/6500kw/r/min
Carburetor type	Diaphragm	Diaphragm	Diaphragm	Diaphragm	Diaphragm	Diaphragm
Mixed Fuel Ratio	40:1	40:1	40:1	40:1	40:1	25:1
Work rod diameter	26/28mm	26/28mm	26/28mm	26mm	28mm	28mm
Weight	8.5kg	8.5kg	8.5kg	10.62kg	10.62kg	10.62kg



EURO-V



AOSHENG /Brushcutter

4 **STROKE**
Engine

CG350A-GX



BG350A-GX



Excellent torque for demanding jobs 38cc 4-stroke engine New deflector design for increased operator visibility Excellent balance and feel Ergonomically designed and Easy to start with air purge and Smart Start.

TECHNICAL SPECIFICATIONS	CG350A-GX	BG350A-GX
Displacement	38cc	38cc
Mating Power	140F-GX	140F-GX
Power	0.9/6500kw/r/min	0.9/6500kw/r/min
Carburetor type	Diaphragm	Diaphragm
Mixed Fuel Ratio	Separate	Separate
Work rod diameter	26/28mm	26/28mm
Weight	8.3kg	10kg



EURO-V



PRO
Brushcutter



EB1800



Backpack leaf blowers provide the added power and air speed needed to clear leaves, sand, gravel and other debris from larger land areas. While they weigh more than handheld units, ergonomic harnesses spread the weight to reduce fatigue and strain on your back, arms and hands.

TECHNICAL SPECIFICATIONS

EB1800

Displacement	75.6cc
Mating Power	1E51F
Power	3.0/7200kw/r/min
Mixed Fuel Ratio	25:1
Fuel consumption	544g/kw.h
Fuel Capacity	3L
Air volume	0.5m³/s
Weight	12.6kg

EURO-V   **CE**

EBV260/EB260



EB310



The AOSHENG handheld gas leaf blower offers the convenience and power you desire. The 26cc, 2-cycle gas engine is lightweight and powerful with high performance air volume and air speed up to

TECHNICAL SPECIFICATIONS	EB260/EBV260	EB310
Displacement	26cc	31cc
Mating Power	1E34FC	1E37F
Power	0.7/7000kw/r/min	1.0/6500kw/r/min
Mixed Fuel Ratio	40:1	40:1
Carburetor type	Diaphragm	Diaphragm
Air volume	0.19m³/s	0.23m³/s
Weight	5.56kg	6.56kg

AOSHENG /WATER PUMP

4 **STROKE**
Engine



QGZ25/40-30C



QGZ25/40-30-GX



SPECIFICATIONS	QGZ25-30C/QGZ40-30C	QGZ25-30C/QGZ40-30C
Displacement	38cc	38cc
Mating Power	140F	140F
Power	0.9/6500kw/r/min	0.9/6500kw/r/min
Mixed Fuel Ratio	Separate	Separate
Fuel Capacity	1L	1L
Lift	30m	30m
Outlet diameter	1" /1.5"	1" /1.5"
Weight	7.48kg	7.48kg

EURO-V   **CE**

QGZ25/40-30-5B



QGZ40-30-5BA



QGZ25/40-30

Our Water Transfer Pump is designed for handle the Toughest Jobs. Use to drain a pool in no time, empty a flooded basement, pump out a flooded trench, fill or empty a water storage tank or reservoir, irrigate a field, hose down a construction site and more.

SPECIFICATIONS	QGZ40-30-5BA	QGZ25-30-5B/QGZ40-30-5B	QGZ25-30/QGZ40-30
Displacement	43cc	43cc	40.2cc
Mating Power	1E40F-5	1E40F-5	1E40F-6
Power	1.25/6500kw/r/min	1.25/6500kw/r/min	1.45/7000kw/r/min
Mixed Fuel Ratio	40:1	40:1	40:1
Fuel Capacity	0.85L	0.85L	0.85L
Lift	35m	30m	30m
Outlet diameter	1.5"	1" /1.5"	1" /1.5"
Weight	7.48kg	7.48kg	6.5kg

EURO-V  **CE**

AOSHENG /POLE SAW



AS-GZ330/AS-GZ260



TECHNICAL SPECIFICATIONS	AS-GZ330	AS-GZ260
Displacement	33cc	26cc
Mating Power	1E36F-5B	1E34F-5B
Power	0.9/6500kw/r/min	0.7/6500kw/r/min
Mixed Fuel Ratio	40: 1	40: 1
Carburetor type	Diaphragm	Diaphragm
Length	2-4M	2-4M
Guide Bar Size	12"	12"
Workrod diameter	Φ26mm	Φ26mm

EURO-V   




SPECIFICATIONS	DG260	DG430	DG520
Displacement	26cc	43cc	52cc
Mating Power	1E34F-5B	1E40F-5B	1E44F-5B
Power	0.7/6500kw/r/min	1.25/6500kw/r/min	1.46/6500kw/r/min
Carburetor type	Diaphragm	Diaphragm	Diaphragm
Mixed Fuel Ratio	40:1	40:1	25:1
Work rod diameter	26mm	26mm	26mm
Hedge trimmer blade	40cm	40cm	40cm
Bar size	12inch	12inch	12inch

AOSHENG /MIST DUSTER



Control Handle

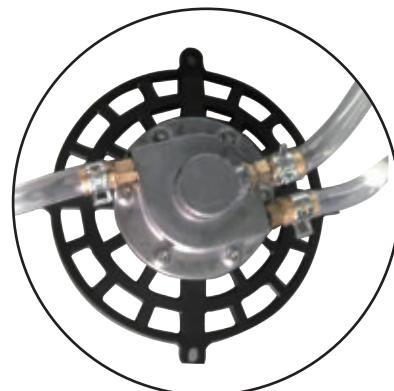

Booster Pump

3WF-3GX




TECHNICAL SPECIFICATIONS

3WF-3GX

Displacement	42cc
Mating Power	1E40F-3Z
Power	2.13/7500kw/r/min
Mixed Fuel Ratio	25: 1
Carburetor type	Float
Tank capacity	14/16/20/26L
Horizontal range	≥12m
The vertical range	≥8m

EURO-V   

AOSHENG / DRILLING MACHINE

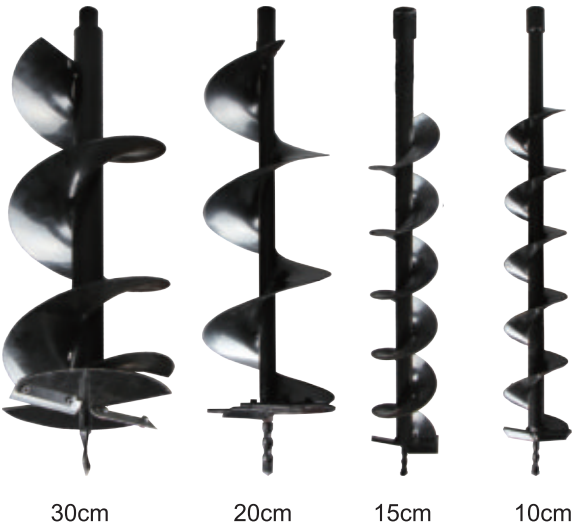

AS52/43



earth auger helps with simplifying outdoor work load. It is perfect for digging holes for fence posts and plants and digs through even the toughest soil.




SPECIFICATIONS	AS52	AS43
Displacement	52cc	43cc
Mating Power	1E44F-5	1E40F-5B
Power	1.46/6500kw/r/min	1.25/6500kw/r/min
Mixed Fuel Ratio	25:1	25:1
Drill diameter	Φ200mm	Φ200mm
Reduction	40:1	40:1

EURO-V   

AOSHENG /HEDGE TRIMMER

PRO
Brushcutter

KD260

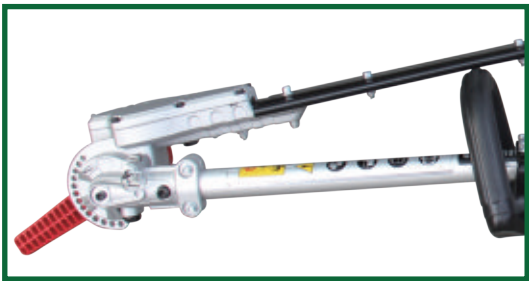

This hedge trimmer with safty device when the user fold the blade even the engine still run the blade will stop



TECHNICAL SPECIFICATIONS

KD260

Displacement	26cc
Mating Power	1E34F-5B
Power	0.7/7500kw/r/min
Mixed Fuel Ratio	40: 1
Carburetor type	Diaphragm
Work rod diameter	26mm
Weight	5.5kg

EURO-V   

AOSHENG /48V LITHIUM PRUNERS

**Brushless
Power System**



AS48LIS

- ※ Blade Material Sk5 imported from JAPAN
- ※ Double action start switch, ensure safety
- ※ It can cut 20mm branch 10000times

TECHNICAL SPECIFICATIONS

AS48LIS

Rated voltage	DC48V
Battery Capacity	4Ah
Rated power	300W
Shaker weight	1kg
Maximum cutting	30mm
Working time	8.0h
Charge time	3h
Battery weight	1.5kg



EURO-V   **CE**

AOSHENG /OLIVE SHAKER

PRO
Olive shaker

Kawasaki



SPECIFICATIONS

AS01ZG

Displacement	53.2cc
Mating Power	Kawasaki
Power	2.0/7500kw/r/min
Mixed Fuel Ratio	25:1
Fuel Capacity	1.1L
Length	3-4.5m
Hook the diameter	40mm
Weight	18kg

EURO-V   CE

AS01ZG

AOSHENG /LITHIUM OLIVESHAKER



AS48LiO

SPECIFICATIONS

AS48LiO

Rated voltage	DC48V Samsung/Chinese
Power	150W
Battery Capacity	8/10/10.5Ah
No load low-speed	760rpm
No load high-speed	1100rpm
Working time	8.0h
Telescopic rod length	2.1-3.1m
Battery type	Knapsack
Charge time	6h
Shaker weight	3.15kg
Battery assy weight	4.7kg



AS12LO

SPECIFICATIONS

AS12LO

Power	50W
No load speed	700-1000rpm
Voltage	12V
Cable length	15m
Telescopic rod length	2.1-3.1m
Shaker weight	3.15kg

AOSHENG /BLOWER/HEDGE TRIMMER



Model:EB600

0.072CBM

- Mating Power:1E46F-3
- Displacement:57cc
- Power:2.5kw/6500r/min
- Weight:8.2kg
- Mixed Fuel Ratio:25:1
- Fuel capacity:1.75L
- Air volume:0.28m³/s
- Carburetor type:Butterfly



Model:EB800

0.1CBM

- Mating Power:1E52F
- Displacement:77cc
- Power:3.6kw/6500r/min
- Weight:12.6kg
- Mixed Fuel Ratio:25:1
- Fuel capacity:2L
- Air volume:0.3m³/s
- Carburetor type:Diaphragm



Model:EB400

0.07CBM

- Mating Power:140F
- Displacement:38cc
- Power:0.9kw/6500r/min
- Weight:9kg
- Mixed Fuel Ratio:Separate
- Fuel capacity:1L
- Air volume:0.3m³/s
- Carburetor type:Diaphragm



Model:3CX-600H

0.077CBM

- Mating Power:1E34FH
- Displacement:26cc
- Power:0.7kw/7500r/min
- Weight:6.1kg
- Mixed Fuel Ratio:25:1
- Handle:Two single handle
- Cutting:600mm
- Reduction ratio:5.1



AOSHENG /MIST DUSTER



Booster Pump



Model:3WB-750

0.12CBM

- Mating Power:1E40F-5A
- Displacement:43cc
- Power:1.25kw/7000r/min
- Weight:9.86kg
- Carburetor type:Float type
- Mixed Fuel Ratio:25:1
- Tank capacity:14/20L
- Horizontal range:≥12m
- The vertical range:≥8m



Handle




Rope start



Model:3WF-80

0.15CBM

- Mating Power:1E52F
- Displacement:77cc
- Power:3.6kw/6500r/min
- Weight:11.56kg
- Carburetor type:Diaphragm
- Mixed Fuel Ratio:25:1
- Tank capacity:17L
- Horizontal range:≥17m
- The vertical range:≥11m



Booster Pump



Model:3WF-750

0.1CBM

- Mating Power:1E46F-3
- Displacement:57cc
- Power:2.5kw/7500r/min
- Weight:9.88kg
- Carburetor type:Throttle type
- Mixed Fuel Ratio:25:1
- Tank capacity:14/20L
- Horizontal range:≥12m
- The vertical range:≥8m



Model:3F-30

0.18CBM

- Mating Power:1E46F
- Displacement:58cc
- Power:2.0kw/7500r/min
- Weight:11.32kg
- Carburetor type:Float type
- Mixed Fuel Ratio:25:1
- Tank capacity:30L
- Horizontal range:≥12m
- Tank capacity:30L



Booster Pump



φ 49/ φ 52

Model:3WF-3/A/B/C

0.18CBM

- Mating Power:1E40F-3Z
- Displacement:42cc
- Power:2.13kw/7500r/min
- Weight:11.12kg
- Carburetor type:Float type
- Mixed Fuel Ratio:25:1
- Tank capacity:14/16/20/26L
- Horizontal range:≥12m
- The vertical range:≥8m



Model:3WF-140

0.18CBM

- Mating Power:140F
- Displacement:38cc
- Power:0.9kw/6500r/min
- Weight:13.3kg
- Carburetor type:Diaphragm
- Mixed Fuel Ratio:Separate
- Tank capacity:14/16/20/26L
- Horizontal range:≥12m
- The vertical range:≥8m

AOSHENG /LAWNMOWER



Model:AS506SA

0.23CBM

- Mating Power:AS1P70FA
- Displacement:173cc
- Power:3.0kw/3000r/min
- Cutting width:500mm
- Fuel consumption:≤395g/kw.h
- Fuel capacity:1.8L
- Catcher Volum:50-60L
- Mowing heigth:25-80



Hand push 手推




Self-propelled 自走

Increase structure



7 stalls adjustable

Cutting method



40MNB manganese steel blade



Model:AS505HA-C

0.23CBM

- Mating Power:AS1P65FA
- Displacement:139cc
- Power:2.8kw/3000r/min
- Cutting width:500mm
- Fuel consumption:≤420g/kw.h
- Fuel capacity:1.6L
- Catcher Volum:50-60L
- Mowing heigth:25-80



AOSHENG /LAWNMOWER



Model:AS506HA-C

0.23CBM

- Mating Power:AS1P70FA
- Displacement:173cc
- Power:3.0kw/3000r/min
- Cutting width:500mm
- Fuel consumption:≤395g/kw.h
- Fuel capacity:1.8L
- Catcher Volum:50-60L
- Mowing heigh:25-80



Model:AS506HA

0.23CBM

- Mating Power:AS1P70FA
- Displacement:173cc
- Power:3.0kw/3000r/min
- Cutting width:500mm
- Fuel consumption:≤395g/kw.h
- Fuel capacity:1.8L
- Catcher Volum:50-60L
- Mowing heigh:25-80



Model:AS506HC

0.23CBM

- Mating Power:GXV160
- Displacement:163cc
- Power:2.0kw/3000r/min
- Cutting width:500mm
- Fuel consumption:≤395g/kw.h
- Fuel capacity:1.8L
- Catcher Volum:50-60L
- Mowing heigh:25-80



AOSHENG /SPRAYER



Model:AS768

0.11CBM

- Mating Power:135F
- Displacement:25cc
- Power:0.65kw/6500r/min
- Weight:9.06kg
- Range:≥9m
- Mixed Fuel Ratio:Separate
- Tank capacity:25L
- Working pressure:1.5-2Mpa
- Plunger diameter:18mm



Model:AS767C

0.82CBM

- Mating Power:1E34F
- Displacement:26cc
- Power:1.46kw/6500r/min
- Weight:8.32kg
- Range:≥9m
- Mixed Fuel Ratio:25:1
- Tank capacity:14L
- Working pressure:1.5-2Mpa
- Plunger diameter:18mm



Model:AS768A

0.11CBM

- Mating Power:1E33F
- Displacement:26cc
- Power:0.65kw/6500r/min
- Weight:8.74kg
- Range:≥9m
- Mixed Fuel Ratio:25:1
- Tank capacity:25L
- Working pressure:1.5-2Mpa
- Plunger diameter:18mm

4 STROKE
Engine



Model:AS800C/800D

0.12CBM

- Mating Power:140F
- Displacement:38cc
- Power:0.9kw/6500r/min
- Weight:10.06kg
- Range:≥9m
- Mixed Fuel Ratio:Separate
- Tank capacity:25L
- Working pressure:1.5-2Mpa
- Plunger diameter:18mm

Power sprayer series



Model:CG260



0.038CBM

- Mating Power:1E34F-B
- Displacement:26cc
- Horsepower:1HP
- Weight:6kg
- Mixed Fuel Ratio:25:1

Model:CG330



0.038CBM

- Mating Power:1E36F-2
- Displacement:33cc
- Horsepower:1.3HP
- Weight:7.8kg
- Mixed Fuel Ratio:25:1

Model:CG430



0.038CBM

- Mating Power:1E40F-5
- Displacement:43cc
- Horsepower:1.8HP
- Weight:8kg
- Mixed Fuel Ratio:25:1

Model:CG520



0.038CBM

- Mating Power:1E44F-5
- Displacement:52cc
- Horsepower:2HP
- Weight:9.0kg
- Mixed Fuel Ratio:25:1

Model:CG260T



0.038CBM

- Mating Power:EB26
- Displacement:26cc
- Horsepower:1HP
- Weight:6kg
- Mixed Fuel Ratio:25:1

Model:CG330T



0.038CBM

- Mating Power:TB33
- Displacement:33cc
- Horsepower:1.3HP
- Weight:7.8kg
- Mixed Fuel Ratio:25:1

Model:CG430T



0.038CBM

- Mating Power:TB43
- Displacement:43cc
- Horsepower:1.8HP
- Weight:8kg
- Mixed Fuel Ratio:25:1

Model:CG520T



0.038CBM

- Mating Power:TB52
- Displacement:52cc
- Horsepower:2HP
- Weight:9kg
- Mixed Fuel Ratio:25:1

Model:CG411



0.038CBM

- Mating Power:1E40F-6
- Displacement:41cc
- Horsepower:2HP
- Weight:8kg
- Mixed Fuel Ratio:25:1

Model:CG411T



0.038CBM

- Mating Power:1E40F-6T
- Displacement:41cc
- Horsepower:2HP
- Weight:8kg
- Mixed Fuel Ratio:25:1

Model:BG430A/BG520A



0.038CBM

- Mating Power:1E40F-5/1E44F-5
- Displacement:43/52cc
- Horsepower:1.8/2HP
- Weight:13kg
- Mixed Fuel Ratio:25:1

Model:BG328B





0.038CBM

- Mating Power:1E36F
- Displacement:30.5cc
- Horsepower:0.87HP
- Weight:10.2kg
- Mixed Fuel Ratio:25:1

OPTIONAL PARTS

Choose the right type of cutting tools for your job.

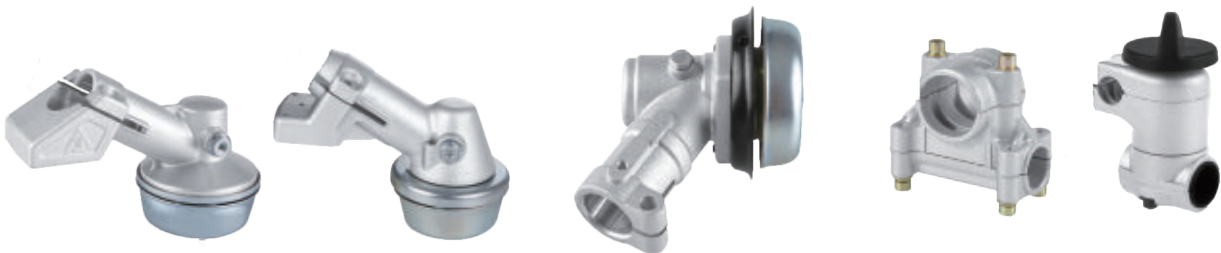

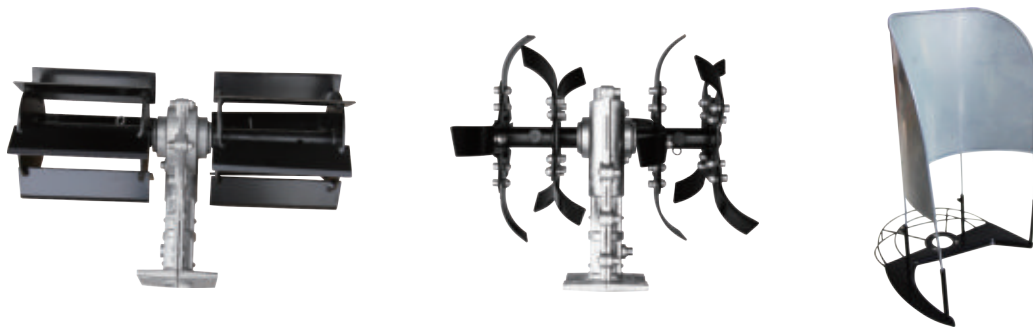

TECHNOLOGY CREATES A GREEN WORLD



AOSHENG

Ningbo AOSHENG Machine Co.,Ltd

Add: Linshan Industrial Park, Yuyao, Zhejiang

Tel: 86-0574-62037810 62036288 Fax: 86-0574-62037800

Http://www.aosheng.com.cn E-mail: aosheng@aosheng.com.cn

